

Ammonia Gas Detector GM8806



Function

- ▶ LED backlight
- ▶ Zero point calibration
- ▶ Reading hold function
- ▶ Ammonia content detecting
- ▶ High/low limits capable of private setup
- ▶ Alarm of over high/low ammonia content
- ▶ Selectable of automatic turn-off or non-automatic turn-off
- ▶ Switching between temperature units and environment temperature
- ▶ Detecting mode selection among current value, maximum value and average value

Specification

Gas detected	Nh3 content in the air
Range	0~100ppm
Resolution	1ppm
Minimum reading	1ppm
Maximum error	≤50ppm:±5ppm;(50~100)ppm:±10%
Response time	≤120s
Sensor type	Electrochemical ammonia sensor
Alarm	Sound alarm
Operating environment	0°C~40°C (32°F~104°F);10%RH ~90%RH (Without condensation)
Powered by	2x1.5V AAA batteries
Size	55.7*29.9*135.5mm
Weight	104g



PVC transparent hose

Application



Food industry




Petroleum industry



Aquaculture



Fire fighting

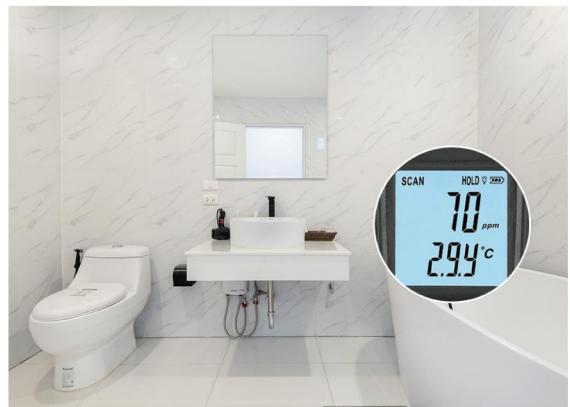

ติดต่อบริษัท นีโอนิกส์ จำกัด

Tel: 02-077-7602 หรือ 061-8268939

E-mail: sale@neonics.co.th เว็บไซต์ www.neonics.biz