



DIGITAL AC CLAMP METER MS2026 / MS2026R

MS2026

JAW SIZE
Φ40mm/1.6"

VOLTAGE DC 1000V
AC 750V

CURRENT
AC 1000A



Specifications MS2026 MS2026R

Specifications	Range	Accuracy		
DC Voltage	600mV/6V/60V/600V	±(0.7%+2)	±(0.7%+2)	
	1000V	±(0.8%+2)	±(0.8%+2)	
AC Voltage	6V/60V/600V	±(0.8%+3)	±(0.8%+3)	
	750V	±(1.0%+4)	±(1.0%+4)	
AC Current	6A/60A/600A/1000A	±(2.0%+6)	±(2.0%+6)	
	Resistance	600Ω/6kΩ/60kΩ/600kΩ	±(0.8%+3)	±(0.8%+3)
Resistance	6MΩ/60MΩ	±(1.2%+3)	±(1.2%+3)	
	Capacitance	40nF/400nF/4μF/40μF/400μF/4000μF	±(4.0%+5)	±(4.0%+5)
Frequency	A	99.99Hz/999.9Hz	±(1.5%+5)	±(1.5%+5)
		>1kHz	Take it only as reference	Take it only as reference
	V	99.99Hz/999.9Hz/9.999kHz	±(1.5%+5)	±(1.5%+5)
		>10kHz	Take it only as reference	Take it only as reference
Hz/ DUTY	9.999/99.99/999.9Hz/9.999/99.99/999.9kHz/9.999MHz	±(0.3%+5)	±(0.3%+5)	
Duty Cycle	0.1%~99%	±3.0%	±3.0%	

Features		MS2026	MS2026R
Display	counts	6000	6000
Jaw Opening		Φ40mm/1.6"	Φ40mm/1.6"
Auto Ranging	Auto & Manual	●	●
APO	Auto Power Off	●	●
Diode	3.3V	●	●
Continuity Buzzer	<50Ω	●	●
MAX/MIN		●	●
REL	Relative Measurement	●	●
Data Hold		●	●
LBD	Low Battery Display	●	●
Display Backlight		●	●
Work Light		●	●
True RMS	True Root Mean Square	●	●
General			
Power Supply	3x1.5V AAA Batteries		
Product Size	222mmx86mmx32mm/8.74"x3.38"x1.26"		
Product Weight	323g/0.71lb		
Safety Rating	CAT III 600V RoHS		

● Feature Difference

MS2026R

JAW SIZE
Φ40mm/1.6"

VOLTAGE DC 1000V
AC 750V

CURRENT
AC 1000A



DIGITAL AC/DC CLAMP METER MS2138 / MS2138R



Specifications MS2138 MS2138R

Specifications	Range	Accuracy		
DC Voltage	400mV	±(0.8%+2)	±(0.8%+2)	
	4V/40V/400V	±(0.7%+2)	±(0.7%+2)	
	600V	±(0.8%+2)	±(0.8%+2)	
AC Voltage	4V/40V/400V	±(0.8%+3)	±(0.8%+3)	
	600V	±(1.0%+4)	±(1.0%+4)	
	DC Current	40A/400A/1000A	±(3.0%+6)	±(3.0%+6)
AC Current	40A/400A/1000A	±(2.5%+6)	±(2.5%+6)	
	Resistance	400Ω/4kΩ/40kΩ/400kΩ	±(0.8%+3)	±(0.8%+3)
Resistance	4MΩ/40MΩ	±(1.2%+3)	±(1.2%+3)	
	Capacitance	40nF/400nF/4μF/40μF/400μF/4000μF	±(4.0%+5)	±(4.0%+5)
Frequency	A	99.99Hz/999.9Hz	±(1.5%+5)	±(1.5%+5)
		>1kHz	Take it only as reference	Take it only as reference
	V	99.99Hz/999.9Hz/9.999kHz	±(1.5%+5)	±(1.5%+5)
		>10kHz	Take it only as reference	Take it only as reference
Hz/ DUTY	9.999/99.99/999.9Hz/9.999/99.99/999.9kHz/9.999MHz	±(0.5%+2)	±(0.5%+2)	
Duty Cycle	0.1%~99%	±3.0%	±3.0%	

Features		MS2138	MS2138R
Display	counts	4000	4000
Jaw Opening		Φ40mm/1.6"	Φ40mm/1.6"
Auto Ranging	Auto & Manual	●	●
APO	Auto Power Off	●	●
Diode	3.3V	●	●
Continuity Buzzer	<50Ω	●	●
MAX/MIN		●	●
REL	Relative Measurement	●	●
Data Hold		●	●
LBD	Low Battery Display	●	●
Display Backlight		●	●
Work Light		●	●
Bar Graph	Segments Bar Graph	●	●
True RMS	True Root Mean Square	●	●
General			
Power Supply	3x1.5V AAA Batteries		
Product Size	222mmx86mmx32mm/8.74"x3.38"x1.26"		
Product Weight	323g/0.71lb		
Safety Rating	CAT III 600V RoHS		


● Feature Difference

MS2138

JAW SIZE
Φ40mm/1.6"

VOLTAGE DC 600V
AC 600V

CURRENT
DC 1000A
AC 1000A

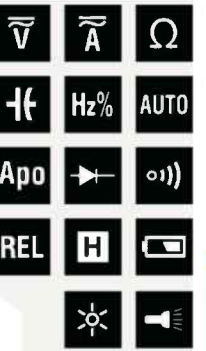

MS2138R

JAW SIZE
Φ40mm/1.6"

VOLTAGE DC 600V
AC 600V

CURRENT
DC 1000A
AC 1000A

