

Infrared Thermometer




GM1150




GM1150A



GM1350

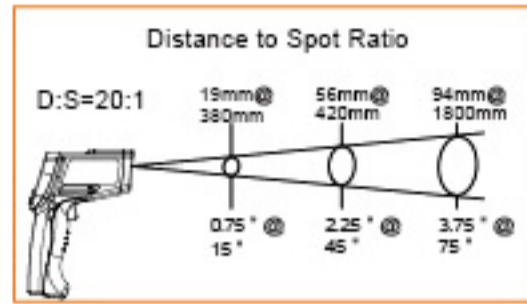

GM1150

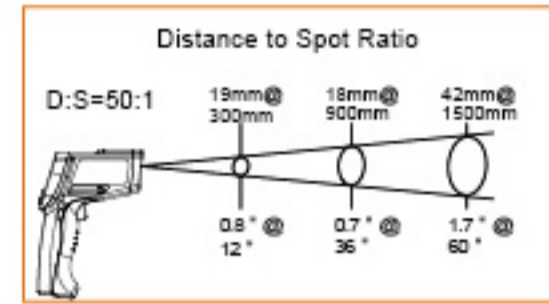

GM1150A/GM1350

Technical indicators	GM1150	GM1150A	GM1350
Measuring range	-50~1150°C (-58~2102°F)	-18~1150°C (0~2102°F)	-30~1350°C (22~1350°F)
Precision	±1.5%or±1.5°C	±1.5%or±1.5°C	±1.5%or±1.5°C
Repetitive	1% or 1°C	1% or 1°C	1% or 1°C
Distance Spot Ratio	20:1	50:1	50:1
Emissivity	0.1~1.0 Adjustable	0.1~1.0 Adjustable	0.1~1.0 Adjustable
Repeatability	0.1°C/0.1°F	0.1°C/0.1°F	0.1°C/0.1°F
Response Time	1500ms	500ms	500ms
Wavelength	8-14μm	8-14μm	8-14μm
Peculiarity			
MAX/MIN/AVG/Yi-Xi	√	√	√
°C/°F Selection	√	√	√
Keep data display	√	√	√
Locate laser on/off	√	√	√
Backlight ON/OFF	√	√	√
Measurement data stored	√	√	√
High/low temperature alarm	√	√	√
Auto power-off	√	√	√
Conventional			
Power supply	9V batteries		
Product size	200*141*60mm		
Product weight	315g (+batteries)		

 **CAUTION** LASER RADIATION. DO NOT STARE INTO BEAM. CLASS II LASER PRODUCT.

กรุณาติดต่อ
บริษัท เนโอเนิกส์ จำกัด
โทร 02-077-7602 หรือ 061-8268939 E-
mail:sale@neonics.co.th

LINE ID:neonicstool

